


AX ELR

MULTI CAL ANTI MATERIEL RIFLE

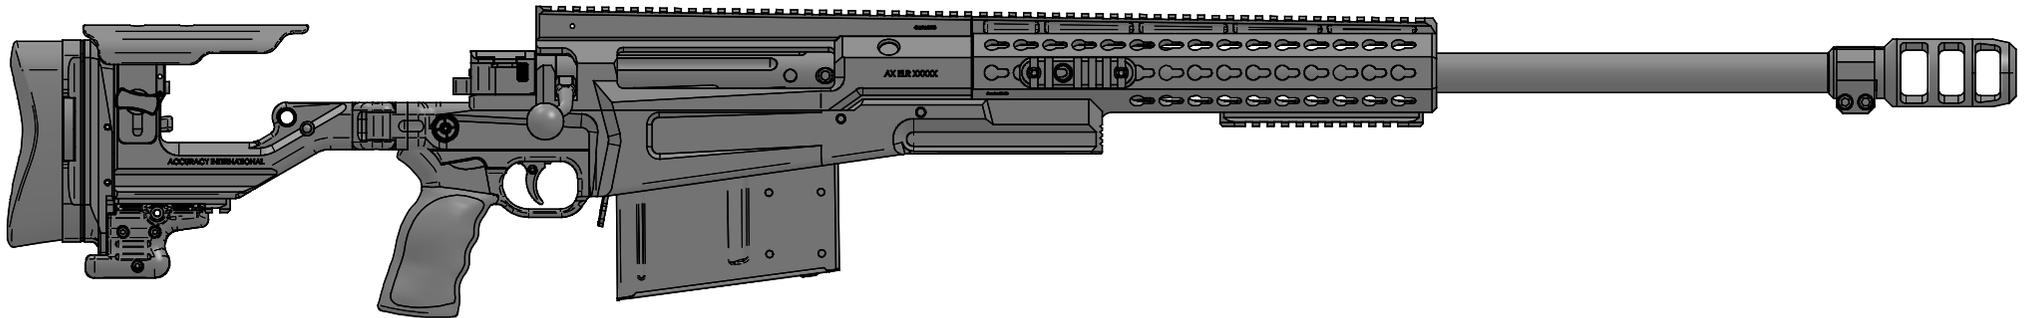

CALIBRES / BARRELS

.50 BMG (12.7 x 99 mm): 27" bbl, 1 in 15" twist

.408 (10.36 x 77 mm): 29" bbl, 1 in 12" twist

All AI barrels are stainless steel with M24 x 1 muzzle thread, fitted with AI triple chamber muzzle brake

WEIGHT

Configured to .50 BMG with muzzle brake, empty magazine, standard accessory rails, no scope, no bipod: 12.06 kg

DIMENSIONS

With 27" barrel, muzzle brake, 2 x 10 mm spacers
Full length: 1383 x 220 x 120 mm
Stock folded: 1145 x 220 x 120 mm

FEATURES

Proofed EN24T steel action and bolt body with maraging steel bolt head and lock ring

AI's Quickloc barrel system

Action bolted to the aluminium chassis with 5 action screws

Forend tube with KeySlot mounting system, Arca-Swiss style dovetail tripod rail and barricade support

6 lug, 60° bolt throw with AI leaf spring extractor

3 position shroud style safety

Two stage trigger adjustable for trigger weight between 1.5 and 2 kg

Detachable 10-round double stack magazine (also top loadable though the rifle ejection port)

Left side magazine port cut out for ease of magazine insertion

SPECIFICATION

Right side folding stock over bolt

Toolless, quick adjust cheekpiece

Toolless, quick adjust butt pad with spacers

LOP adjustment 49 mm (excluding spacers)

Rear grip (rail mounted)

Rubber AR style changeable pistol grip

Flush cup sling attachment points

45 MOA STANAG 4694 / Mil Std 1913 action rail and forend rail

Triple chamber muzzle brake

1 x 140 mm plain accessory rail

2 x 80 mm flush cup accessory rails

User manual

1 x 10 round double stack CIP magazine

COLOURS

Cerakote high performance firearm coating



ACCESSORIES

Calibre conversion kits comprising barrel, bolt and magazine .50 BMG | .408

STANAG 4694 / Mil std 1913 accessory rails to attach to AI's patented KeySlot™ mounting system

Bipods and mounts | Quick adjust butt spike

Handstop with sling loop and flush cup

Slings | Suppressor | Scope mounts

Transit cases | Cleaning kits